

WW90II GAS POWERED FRAMING NAILER

The new WW90II gas powered nailer is a perfect cordless alternative to the most popular solutions used when fixing in structural timber. It delivers comfort and safety, but also increases efficiency at work.



FEATURES AND BENEFITS

Tool's engine energy output increased to 104 J to enable driving the longest 90mm ring shank nails into the hardest substrates

Lithium-Ion battery providing twice the performance - 8000 fixings per charge and charging time of 30 minutes

NEW ergonomically designed grip position for improved balance and working comfort

NEW design with improved durability and improved airflow efficiency through the redesigned air filter zone

Convenient, reliable and accurate fixing thanks to keyless nailing depth adjustment for improved precision and ease of use

Nose protection cap, that protects wood surface from getting damaged and minimises potential material waste

Convenient rafter hook, allowing you to hang up the nailer for a work break or whilst carrying

BASE MATERIALS

Certified for fixing in



Structural timber



Particleboard



Plywood



Wood



OSB





WW90 2nd generation gas powered framing nailer is an excellent cordless alternative for fixing in wooden structures, that require no power cables or compressed air hoses. It ensures mobility, safety and top performance. You can now handle a single fixing point in less than 1 second. With a battery pack whose capacity lasts for 8,000 fixings and the charging time of 30 minutes. You you receive a full package of outstanding benefits in terms of performance and repeated use.

APPLICATIONS

- Battens and counter battens

- Roof boarding

- Framework house structures


- Façades and soffits

- Formwork fixing

- Terraces and arbours



OPERATING INSTRUCTIONS

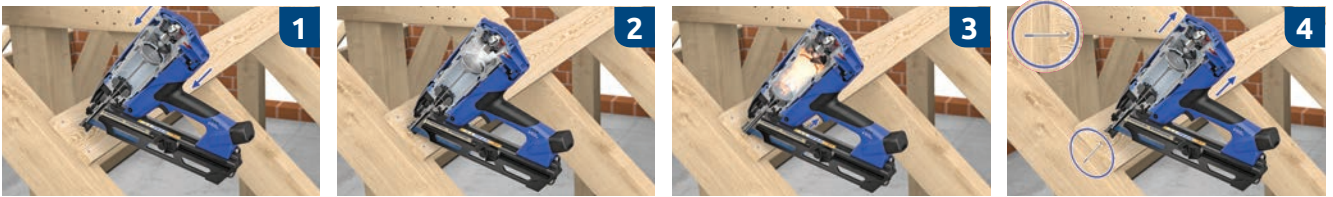

1. Press the tool against the fixture and base material.
2. Wait a fraction of a second for the gas to be mixed with air.
3. Press the trigger to perform a fixing.
4. Remove your finger from the trigger and retract the tool from the fixing point until there is no contact between the nose and the fixture.

PRODUCT INFORMATION





Index	Range of nails	Fixings per charging	Nail type	Dimensions	Weight	Gas container type	Magazine capacity	Battery charging time	Noise level	Weight of unit packaging	Weight of collective packaging	EAN
	[mm]			[mm]	[kg]		[nails]					
R-WW90II	50-90	8000	Paper collated at 34°	394x121,4x407	3,8kg	GP6	60	0.5	94	8,5	17	5906675460246

Gas for gas powered nailers  <p>R-RAWL-GP6 Gas for the R-WW90II nailer providing the best attainable parameters and high efficiency</p>		Cleaning kit for gas actuated tools  <p>R-KIT-WW90/SC40 Cleaning kit for the SC40, SC40II, WW90CH and WW90II gas actuated tools</p>	
Charger with power cord  <p>SP-WW90/SC40II-CH Quick charger (30 min of charging time)</p>		Battery pack  <p>SP-WW90/SC40II-AK Li-Ion batteries 2.5 Ah, 7.2 V</p>	

The package contains:

- R-WW90II gas powered nailer
- 2.5 Ah 7.2 V Li-Ion battery
- Power adapter
- Charger (30 min)
- Operation manual
- Safety goggles and hearing protectors
- Suitcase

ASSOCIATED PRODUCTS

	Ring shank nails	Smooth nails
galvanized	 <p>R-DRG-V Zinc plated ring shank nails for roofing, timber frame houses and all other wood to wood applications.</p>	 <p>R-DPG-V Smooth zinc-plated nails intended for construction of roof structures, framework houses and prefabricated wooden structures</p>
bright	 <p>R-DRK-V Bright ring shank nails for roofing, timber frame houses and all other wood to wood applications.</p>	 <p>R-DPK-V Smooth paper collated nails intended for application in roofing works, construction of framework houses, and similar building applications.</p>